



**PELI**  
**BIO THERMAL™**

# Crēdo™

## XTREME



## PALLET BULK SHIPPER

INTRODUCING OUR HIGH PERFORMANCE, EXTREMELY DURABLE PASSIVE TEMPERATURE-CONTROLLED FULL AND HALF PALLET SHIPPING CONTAINER.

This high performance, extremely durable and reusable passive temperature-controlled pallet shipper is offered in two sizes and is ideal for consolidating large domestic and international cargo shipments. Peli BioThermal's Crēdo™ patented technology provides a revolutionary cost effective temperature-controlled pallet shipper that ensures secure transport of high value pharmaceutical and biotech products – qualified to maintain the required temperature range for 96 - 144 hours. Easy removal and installation of the TIC™ (PCM) system for conditioning provides a significant return on investment with less labor costs, greater volumetric payload size, and reduced risk of product compromise.

### Product Design Features

- Crēdo™ modular design, full stack pallet system easily converts to half pallet for maximum flexibility of payload volume and shipping cost efficiency
- Convenience of four-way forklift accessibility provides convenience and ease of loading in warehouse storage logistics. Attached tie-down strap system for quick loading and unloading
- Extended passive thermal shipping duration capabilities without messy, bulky gel/ice packs or dry ice
- No electricity or expensive refrigerated cargo shipping required, allowing for more transportation choices and an alleviated payload excursion risk due to power failure
- Multiple temperature ranges (frozen, refrigerated, and controlled room temp) with our patented interchangeable, easy packout TIC™ system with PCM (phase change material)



### DURATION

Full / Half Pallet:  
96 - 144 Hours  
(ISTA7D)



### TEMPERATURE

#### SERIES 4

(2°C to 8°C)

#### SERIES 22

(15°C to 25°C)

#### SERIES 20M

(-25°C to -15°C)



### PAYLOAD VOLUME

Full Pallet: 807 Litres  
Half Pallet: 371 Litres



[PELIBIOTHERMAL.COM](http://PELIBIOTHERMAL.COM)




WATCH OUR VIDEO ABOUT THIS PRODUCT [CLICK HERE](#)

# CRÉDO™ XTREME SELL PRODUCT SPECIFICATION

	Payload Size	Exterior Dimensions WxDxH		Interior Dimensions WxDxH		Tare Weight	
		mm	inches	mm	inches	kg	lbs
Series 4	Full Pallet 4C	1226 x 1022 x 1340	48 x 40 x 53	1027 x 825 x 953	40 x 32 x 38	254	560
	Half Pallet 4C	1226 x 1022 x 787	48 x 40 x 31	1027 x 825 x 438	40 x 32 x 17	171	377
Series 22	Full Pallet 22C	1226 x 1022 x 1340	48 x 40 x 53	1027 x 825 x 953	40 x 32 x 38	254	560
	Half Pallet 22C	1226 x 1022 x 787	48 x 40 x 31	1027 x 825 x 438	40 x 32 x 17	171	377
Series 20	Full Pallet 20M	1226 x 1022 x 1340	48 x 40 x 53	1027 x 825 x 953	40 x 32 x 38	279	615
	Half Pallet 20M	1226 x 1022 x 787	48 x 40 x 31	1027 x 825 x 438	40 x 32 x 17	186.9	412

## ADDITIONAL DATA

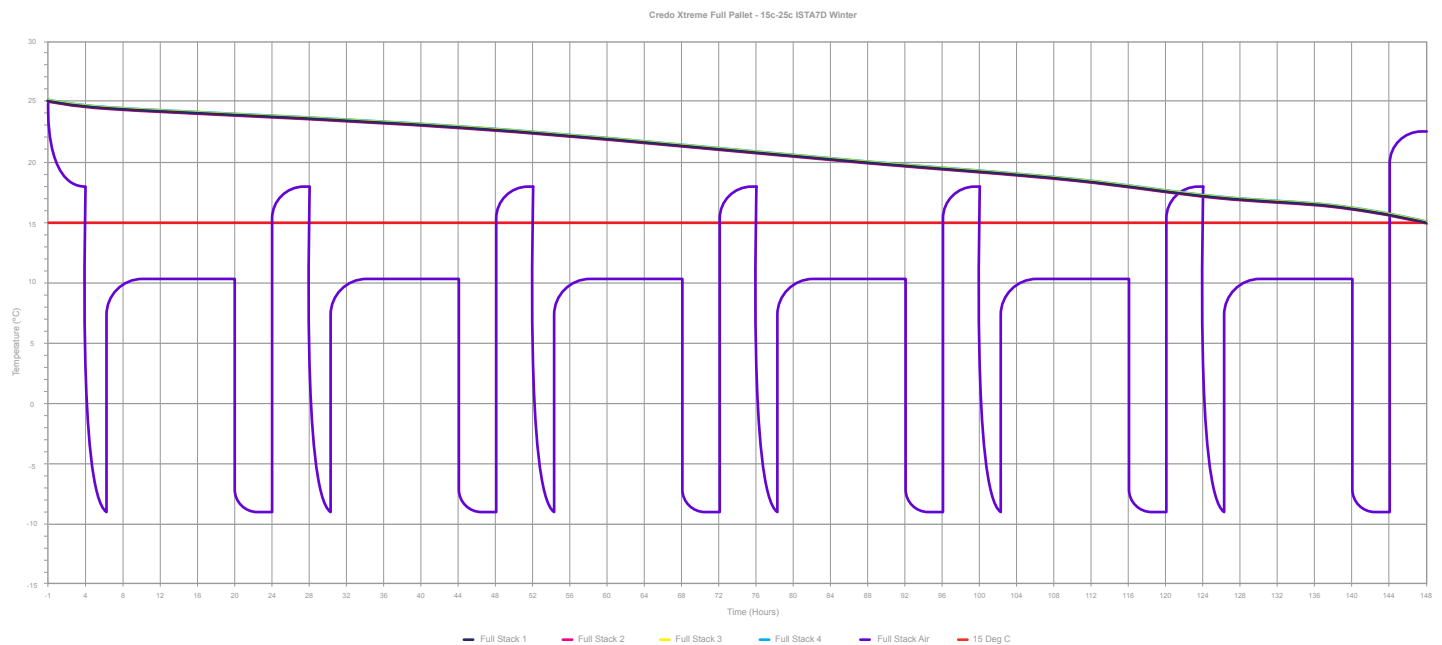

FOR MORE INFORMATION ABOUT PELI BIOTHERMAL PRODUCTS [CLICK HERE](#)

FOR MORE INFORMATION ABOUT PELI BIOTHERMAL PRODUCTS, PLEASE CONTACT:

EMEA OFFICE - INFOEMEA@PELIBIOTHERMAL.COM T: +44 (0)1525 243 770

AMERICAS OFFICE - INFOAMERICAS@PELIBIOTHERMAL.COM T: +1(763) 412-4800 TOLL FREE US: T: +(877) 537-9800

ASIA OFFICE - INFOASIA@PELIBIOTHERMAL.COM T: +65 6681 0095

PELIBIOTHERMAL.COM

ISO17025, ISO9001-2008 Accredited

Golden Hour™, TIC™, Crêdo™, Crêdo Cube™, Crêdo ProEnvision™, Crêdo Xtreme™, Crêdo Duracube™, Crêdo ProMed™, Sherpa Systems™, CoolGuard™ and CoolPall™ are registered trademarks of Pelican Products Inc., its subsidiaries and / or affiliates



©2022 Peli BioThermal Ltd all rights reserved